



Place the springs.


(Be attentive to the position of your hands and the trap during this operation).



- The springs must be positionned on the same side as the trigger.
- Open the jaws by hand.



• Replace the rod on the pivot under the pan.

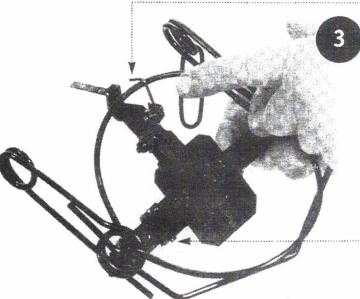

Position of the snare is very important

- Between the double jaws;

- Under the single jaw;

- Under the trigger (dog);

- Through the ring; `.....

• Retighten the snare under the jaws;

 Lower the trigger down over the jaw and lift the pan.

 Remove the security hook after the trap is in place.

