




Nail small piece A in groove of larger piece B with a 2 inch nail.


Drive a 2 and 1/2 inch nail at an angle from the back top of (B) (This is the bait holder)

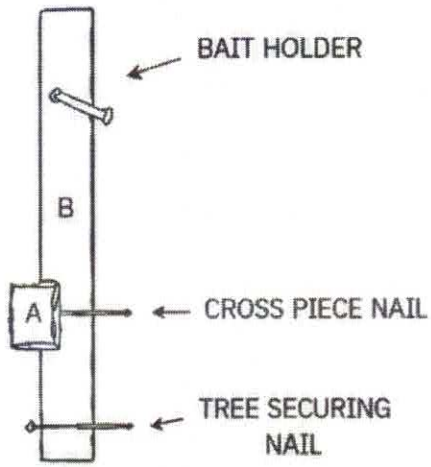

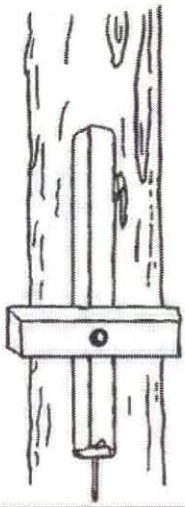


With another 2 inch nail, nail the frame at the bottom to a small 2-3 inch tree at about 3-4 feet off the ground.

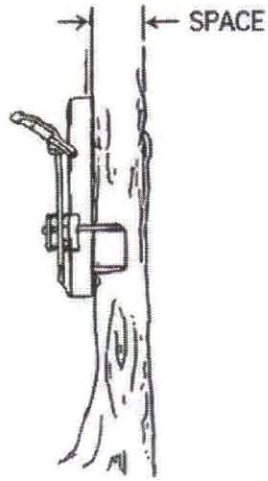

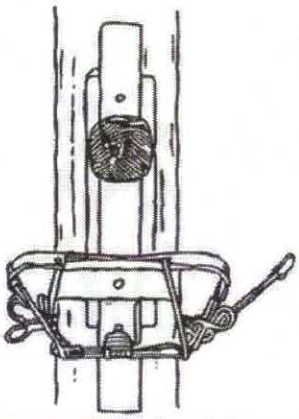


set the trap so the trigger is on the bottom jaw, and push it onto trap holder

secure trap and remove safety hooks, place hood over bait and trap

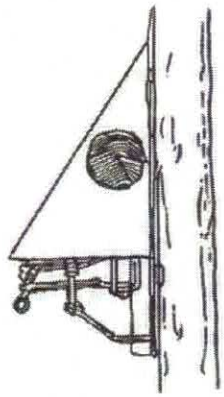


Trigger should be on top jaw with Belisle 120 traps.

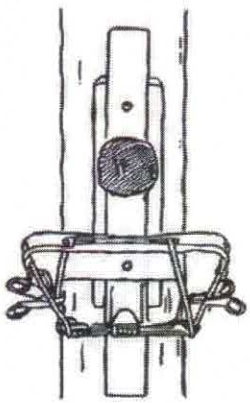

If the trap holder is too small for your trap – you can make it thicker with a small dry stick.

*For weasel just put your bait on the trigger.

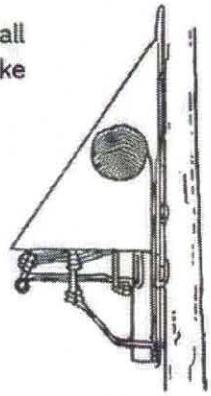

Quick attach, two ways of doing it. You can fasten it to a tree and leave it there, or you can attach it to your trap ring and then fasten to the tree